

Thermo Scientific AquaSensors AV38

DataStick Local Monitor and Controller

Thermo Scientific™ AquaSensors™
DataStick™ measurement system for
universal plug & play



AV38 DataStick Local Monitor and Controller

- Connects to any DataStick system
- Convenient ¼ DIN enclosure
- Display sensor and temperature data
- Menu functions: Calibration, configuration and diagnostics
- Digital protocol options for remote measurement,
- calibration, configuration and diagnostics
- Two 4 to 20 mA current outputs
- Two Form C relays for alarm, control and wash
- PID controller for use with pH and conductivity
- 7 conduit knockouts for easy cabling

Features and Benefits

Mounting Options

Enclosure, NEMA 4X
¼ or ½ DIN NEMA 4X panel mount
Display only with NEMA 4X gasket

Interface

Display: 2 line by 16 character LCD
Backlight: High contrast green
Keypad: 4 directional arrows, MENU, ESCAPE and ENTER

Environmental Conditions

Ambient Operating Temperature Range: -20 to 65 °C
Maximum Relative Humidity: 95% non-condensing
Meets CE requirements for heavy industrial use

Thermo Scientific AquaSensors AV38 DataStick Local Monitor and Controller


Global support—with experience that comes from supporting our customers for over 35 years throughout the world, our water quality specialists and customer support teams offer a quick, thorough and professional response to any problem encountered.

Focus on user benefits—we work closely with you to define your needs, and ensure you are using the monitor in a way that improves your bottom line. For more information, contact your local water quality specialists or visit: www.thermoscientific.com/processwater.

Product Specifications	
Mounting Options	Wall-mount Enclosure: NEMA 4X Panel-mount: ¼ or ½ DIN NEMA 4X panel mount available Display Only: with NEMA 4X Gasket
User Interface	Display: 2 line by 16 character LCD Backlight: High contrast green Keypad: 4 directional arrows, MENU, ESCAPE and ENTER
Environmental Conditions	Ambient Operating Temperature Range: -20 to 65 °C Maximum Relative Humidity: 95% non-condensing
DataStick Sensor Connections	Supports 1 to 255 Modbus® RTU DataStick Sensors of any type Supported Sensors: pH, ORP, two electrode conductivity, two electrode resistivity, toroidal conductivity, dissolved oxygen (ppm and ppb) dissolved ozone, drinking water and wide-range turbidity, suspended solids and free chlorine
4 to 20 Milliamp Current Output Options	Assignable parameters PID function when pH or conductivity parameter selected Loop power provided by AV38
Relays	Two 1 amp Form C relays with NO and NC contacts Assignable parameters Configured for alarm, control and timer functions
Digital Communications	Options to Host Computer Network: MODBUS RTU, DeviceNet, Modbus RS232, RS232 ASCII, CANopen, Ethernet IP, Modbus TCP, TCP/IP Others: Consult factory
Power Supply	Input: 10 to 30 VDC or 100 to 240 VAC (optional) Power: 2W at 25°C
Approvals	Meets CE requirements for heavy industrial use

Ordering Information	
Part No.	Description
AV38-v-w-x-y-z	Local Monitor/Controller
Current Outputs (v)	B = One C = Two
Mounting (w)	B = ¼ DIN NEMA 4X Wall-mount Enclosure
Communications (x)	0 = None 1 = RS232 ASCII 2 = Modbus RS232 4 = MODBUS RTU (for Modbus + Profibus) 5 = DeviceNet 6 = CANopen 7 = Ethernet IP, Modbus TCP, TCP/IP
Relays (y)	A = None C = Two
Power (z)	1 = 24 VDC 2 = 100 to 240 VAC

Consult factory for additional configurations and accessories.

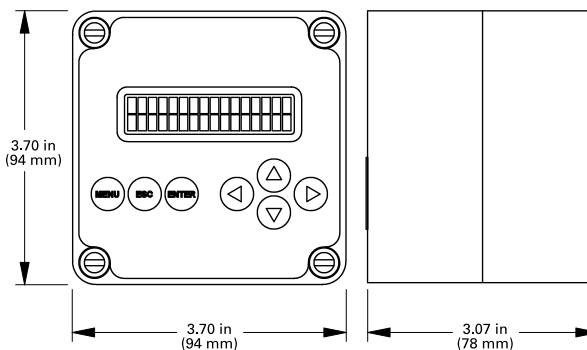

Certified System
Thermo Fisher Scientific
Water Analysis Instruments
Chelmsford, MA USA
Quality Management System
Registered to ISO 9001

thermoscientific.com/processwater

© 2013 Thermo Fisher Scientific Inc. All rights reserved. Modbus is a registered trademark of Schneider Electric. All other trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries.



Water Analysis Instruments

North America
Toll Free: 1-800-225-1480
Tel: 1-978-232-6000
info.water@thermo.com

Netherlands
Tel: (31) 033-2463887
info.water.uk@thermo.com

India
Tel: (91) 22-4157-8800
wai.asia@thermofisher.com

Japan
Tel: (81) 045-453-9175
wai.asia@thermofisher.com

China
Tel: (86) 21-68654588
wai.asia@thermofisher.com

Singapore
Tel: (65) 6778-6876
wai.asia@thermofisher.com

Australia
Tel: (613) 9757-4300
in Australia (1300) 735-295
InfoWaterAU@thermofisher.com